

# Journal of Electronic Materials

## Synthesis of large-scale cadmium oxide nanowires from an aqueous solution --Manuscript Draft--

<b>Manuscript Number:</b>	JEMS-D-21-00730R3	
<b>Full Title:</b>	Synthesis of large-scale cadmium oxide nanowires from an aqueous solution	
<b>Article Type:</b>	Original Research	
<b>Keywords:</b>	crystal growth; Nanocrystalline materials; Microstructure; Electronic materials	
<b>Corresponding Author:</b>	Marjoni Imamora Ali Umar Institut Agama Islam Negeri (IAIN) Batusangkar Batusangkar, Sumatera Barat INDONESIA	
<b>Corresponding Author Secondary Information:</b>		
<b>Corresponding Author's Institution:</b>	Institut Agama Islam Negeri (IAIN) Batusangkar	
<b>Corresponding Author's Secondary Institution:</b>		
<b>First Author:</b>	Marjoni Imamora Ali Umar	
<b>First Author Secondary Information:</b>		
<b>Order of Authors:</b>	Marjoni Imamora Ali Umar Akrajas Ali Umar	
<b>Order of Authors Secondary Information:</b>		
<b>Funding Information:</b>	Ministry of Higher Education of Malaysia under (FRGS/1/2019/STG02/UKM/02/3)	Assoc. Prof. Dr. Akrajas Ali Umar
<b>Abstract:</b>	<p>We report on a simple and template-less technique for growing ultra-long cadmium oxide (CdO) nanowires on the indium tin oxide (ITO) surface from the aqueous solution. The nanowires, free-standing and has a various diameter, are realized on the ITO surface by following a simple hydrothermal reaction of cadmium nitrate and hexamethylenetetramine of a similar molar ratio at 120 °C. The nanowires have a diameter in the range of 10 to 30 nm and a length of up to a few tens of micrometers. We identified that the concentration of the solution precursors is crucial to the growth density of the nanowires on the surface but less important to the structural growth (length and geometry) of the nanowires. Such nanowires might possess unique properties that can be used for prospective photonics and optoelectronics materials.</p>	

Professor Jamie Buonato  
Editor,  
Journal of Electronics Materials

9 July 2021

Dear Professor,

We would like to say thank for your email dated on July 7, 2021, regarding the correction of our references of our article (entitle “**Synthesis of large-scale cadmium oxide nanowires from an aqueous solution**” manuscript No. JEMS-D-21-00730R1) to follow the Journal of Electronics Materials style, i.e.

[Author names, article title. Journal. Volume, page (Year)], **and for example**: S. Preuss, A. Demchuk Jr., M. Stuke, Sub-picosecond UV laser ablation of metals. Appl. Phys. A 61, 33 (1995).

Herewith we are pleased to resubmit our revised article that has followed the journal reference style. The revision that have been made are indicated by the reded and underlined text. We also supply the marked version of the article for your reference.

Finally, we very much appreciate for your kind consideration for publication of our article in this journal.

Sincerely Yours,

Marjoni Imamora Ali Umar  
Department of Physics Education, Faculty of Tarbiyah  
Institut Agama Islam Negeri, Batu Sangkar  
West Sumatera, Indonesia.

## Synthesis of large-scale cadmium oxide nanowires from an aqueous solution

Marjoni Imamora Ali Umar<sup>1\*</sup> and Akrajas Ali Umar<sup>2\*</sup>

<sup>1</sup>Department of Physics Education, Faculty of Tarbiyah, Institut Agama Islam Negeri (IAIN) Batusangkar, 27213 Batusangkar, West Sumatera, Indonesia.

<sup>2</sup>Institute of Microengineering and Nanoelectronics, Universiti Kebangsaan Malaysia, 43600 UKM Bangi, Selangor, Malaysia.

\*Corresponding Author: marjoniimamora@gmail.com (MIAU), akrajas@ukm.edu.my (AAU)

### Abstract.

We report on a simple and template-less technique for growing ultra-long cadmium oxide (CdO) nanowires on the indium tin oxide (ITO) surface from the aqueous solution. The nanowires, free-standing and has a various diameter, are realized on the ITO surface by following a simple hydrothermal reaction of cadmium nitrate and hexamethylenetetramine of a similar molar ratio at 120 °C. The nanowires have a diameter in the range of 10 to 30 nm and a length of up to a few tens of micrometers. We identified that the concentration of the solution precursors is crucial to the growth density of the nanowires on the surface but less important to the structural growth (length and geometry) of the nanowires. Such nanowires might possess unique properties that can be used for prospective photonics and optoelectronics materials.

Keywords: Crystal growth; Nanocrystalline materials; Microstructure; Electronic materials.

### 1. Introduction

Cadmium oxide (CdO) is a fascinating transition metal oxide material with a wide direct electronic bands gap at room temperature, i.e. reaching 2.27 eV (contributed by Cd 5s and O

**Formatted:** Section start: New page, Width: 8.26", Height: 11.69", Header distance from edge: 0.49", Footer distance from edge: 0.49"

2p transition and indirect electronics band gap of 0.55eV (associated with the Cd 4s and O 2p transition) [1]. CdO is a third member in the class of post-transition metal oxides following the series of SnO<sub>2</sub> and In<sub>2</sub>O<sub>3</sub> and the second member following the series of ZnO, which exhibits appealing electrical and optical properties [2]. In the past decade, it has developed into a center of scientific interest owing to its attractive optical properties [3] and large optical third-order nonlinearity character [4], which is potential for optoelectronics, solar cells [5], gas sensors [6], and photocatalysis [7] applications.

There is a growing concern to explore the fascinating nature of this material, especially related to its low-dimensional (1D or 2D) characteristics. Gulino *et al.*, for instance, investigated the electrical and the optical nonlinearity of the CdO when prepared in the form of thin films (2D) system [8]. They found that they greatly improved the optical nonlinearity properties of the CdO when the CdO was prepared as thin films. They attributed such pieces of evidence to the profound effect of crystal symmetry orientation transformation in CdO, especially from centrosymmetric of bulk structure to polar symmetry of thin films structure, which might generate the improvement in their third-order optical nonlinearity. Such results are fascinating and may provide a principal idea to explore the properties of the CdO, in specific when their structural growth is constrained into nanowires structure. There has been an increasing enthusiasm in the preparation and analysis of 1D CdO nanostructure [9]. However, to our best knowledge, to date, few experimental studies reported the growth of CdO nanowires directly on the substrate surface. Since the properties of the material at a reduced-dimension regime greatly depends on their geometrical growth (quantum size effect) and the surrounding medium, an upgraded characteristic and broader application of the CdO nanostructure could be achieved when it is prepared directly on the substrate surface.

In this communication, we present for the first time a simple, seedless, surfactant-less approach to grow CdO nanowires on an indium tin oxide (ITO) surface. By adopting a

hydrothermal reaction between the cadmium nitrate pentahydrate and hexamethylenetetramine at 120 °C for several hours, we can grow a large scale of CdO nanowires on the substrate surface. The present approach is extremely simple and rapid to realize large-scale nanowires on the substrate surface. It has been widely reported that the hydrothermal is a versatile method to prepare a wide variety of metaloxide nanostructure that range from ZnO [10] to WO<sub>3</sub> [11], MnO<sub>2</sub> [12], and ZnS [13]. The specialty of the present study is that we realized the nanowires on the substrate via effective sequential nucleation and growth on the substrate surface, instead of seed-assisted growth process as adopted in the recent literatures [14, 15]. The CdO nanowires should find application in solar cells, optoelectronics and sensing devices.


## 2. Experimental

In preparing CdO nanowires, we simply used two chemicals, i.e. cadmium nitrate and hexamethylenetetramine. Cadmium nitrate pentahydrate (Cd(NO<sub>3</sub>)<sub>2</sub>·5H<sub>2</sub>O) and hexamethylenetetramine (HMT) were purchased from Aldrich Chemical and used directly without further purification. We prepared an aqueous solution of these chemicals utilizing ultrapure water obtained from Autopure WR600A, Yamato Co., Ltd with resistivity > 18.2 MΩ. In a typical experimental procedure, we prepared a 0.1 M mixed solution of Cd(NO<sub>3</sub>)<sub>2</sub> and HMT with a 1:1 molar ratio and then transferred a 5 mL of the solution into a clean glass test tube for the growth process.

A piece of ultrasonicated-clean ITO on a glass substrate with a dimension of ca. 1 cm x 1 cm was then put into the solution with a vertical position. The reaction was controlled at 120 °C for 2 h by transferring the solution into a regular laboratory oven. After the reaction complete, a white film product on the ITO surface was attained. After that, we washed the sample with a copious amount of pure water to remove any residual salt on the surface and dried for 30 min in air at 100 °C.


### 3. Results and discussion.

We have grown the CdO nanowires on the ITO substrate surface. The field emission scanning electron microscopy (FESEM), JSF 7400F JEOL, Japan, was used to study the structural growth of the nanowires. Figure 1 shows a typical FESEM image of CdO nanowires prepared from the 0.1 M precursor solution that was grown for 2 h. We found that a large number, very long CdO nanowires were successfully realized on the ITO surface (Fig. 1A). The high-magnification image of the CdO nanowires reveals the nanowires possess a variable diameter between 10 to 30 nm and length in the range of tens of micrometers (Fig. 1B). It was also observed that the vast majority of the nanowires were free standing without the existence of collision or branching. We performed an X-ray diffraction (XRD) experiments on the sample to evaluate its phase crystallinity. The result is shown in Figure 1C. The diffraction pattern is well-matched with the standard diffraction data for CdO (JCPDS File no 05-0640) and we can associate the obtained peaks with (200), (220), (311) and (222) Bragg planes, confirming the sample is a pure phase CdO. Along with the CdO diffraction peaks, the result also indicates the presence of diffraction from the substrate background.

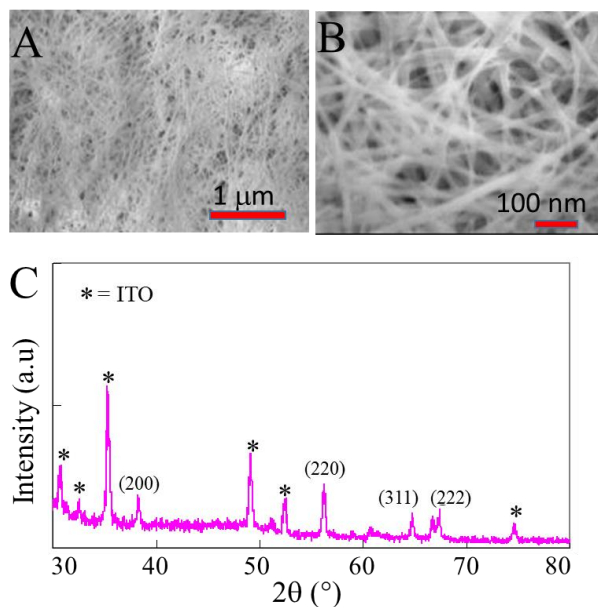

**Figure 1.** (A-B) Typical FESEM image of CdO nanowires growth on the ITO surface using precursor concentration of 0.1 M. The ratio between cadmium nitrate and HMT is 1:1. (C) X-ray diffraction spectrum of CdO nanowires.

The effect of precursor concentration on the structural growth of CdO nanowires under a constant molar ratio between  $\text{Cd}(\text{NO}_3)_2$  and HMT was also carried out. We observed that the concentration of the solution precursors seemed to have no significant effect on the structural growth of the CdO nanowires. Instead, the density of the nanowires on the surface decreased with decreasing the concentration of the solution precursor instead (Fig. 2). We also found that the diameter of the nanowires decrease with the decrease of the concentration of the source solution.

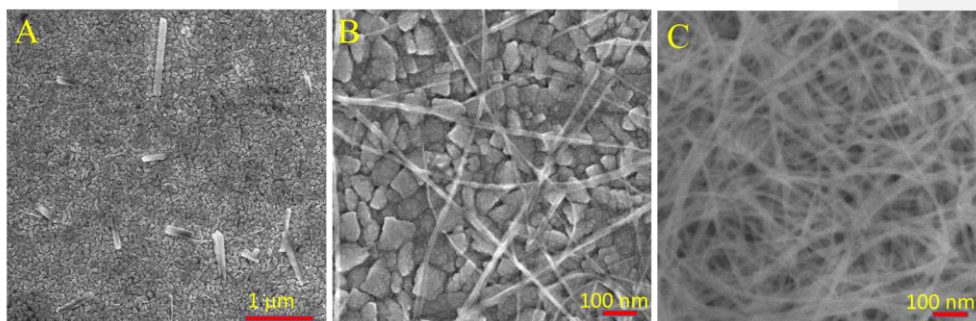

**Figure 2.** Typical FESEM image of CdO nanowires growth on the ITO surface prepared using different solution concentrations; namely 0.001 (A), 0.004 (B), and 0.1 M (C). The molar ratio between the reagents in the solution was kept unchanged. The growth reaction was 2 h.

While the structural growth is independent of the total precursors' concentration under a fixed ratio, it shows a strong dependence on the HMT concentration in the reaction. Under a fixed cadmium nitrate concentration, i.e. 0.1 M, the CdO nanostructures growth increases in the compactness and dimension with the increase of HMT concentration (Fig. 3). At a low HMT concentration, for example, 0.02 M, the morphology of the CdO nanostructure was rod-like shaped structure (Fig. 3A). It then changed to belt-like structures and then finally to nanowires with the increase of the HMT concentration (Fig. 3B-D).

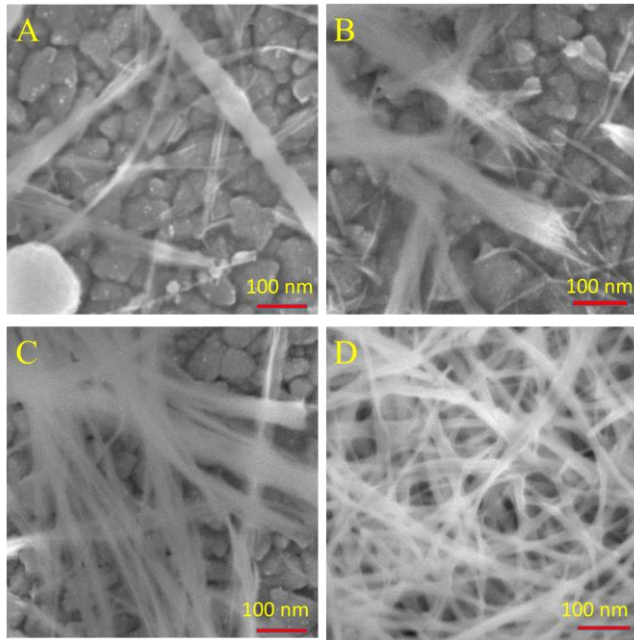


Figure 3. Structural growth of CdO nanowires under different HMT concentration. (A) 0.02, (B) 0.05, (C) 0.07 and (D) 0.1 M. Cadmium nitrate was fixed at 0.1 M. The growth reaction was 2 h.

We also evaluated the nanostructure byproduct that were grown in the bulk solution to further verify the nanowires formation is merely because of the unique crystal growth process on the substrate surface. The result is shown in Figure 4. As the figure reveals, the product are irregular-shape nanostructures. The FESEM analysis results also indicate the formation of big and micro-sized structure in the byproduct that is formed in the bulk solution.

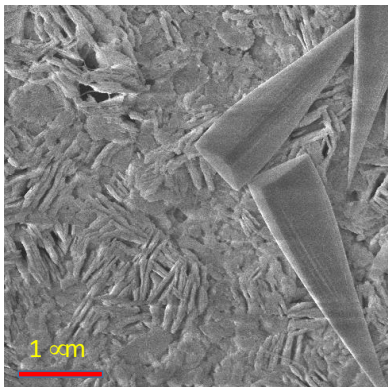


Figure 4. FESEM image of nanostructures byproduct that are formed in the bulk solution.

We believe that the mechanism behind the formation of CdO nanowires is the result of a profound effect of HMT in the reaction. Under a high-temperature hydrothermal reaction, the metal cations were reduced from the cadmium salt precursor and coordinated with oxygen to creating the cadmium oxide. In this process, we predict that the anisotropic growth of CdO system might be because of a stacking effect of the reduced-metal cations toward the principal axis of the CdO crystal, driven by an ample amount of tetradentate amine-metal complex of HMT in the solution. HMT is a cage-like molecule that has a high-symmetry characteristic of cubic space group  $I\bar{4}3m$  [16] with a repeating unit of three atoms fragment of C-NH at the molecular body. Because of the inherent high-affinity nature of the amine group toward metal atoms, it may function as nucleation sites for the reduced-metal systems and directing agent for 1D crystal growth. A similar process has been shown in the synthesis of the 1D system of ZnO [17] and TiO<sub>2</sub> [18] systems.

#### 4. Conclusions

We pointed out that large-scale CdO nanowires of micrometers length can be easily synthesized by applying a simple hydrothermal reaction of cadmium nitrate and

hexamethylenetetramine of similar molar ratio at a moderate high-temperature, 120 °C. By varying the concentration of the solution precursors, we can synthesize nanowires with variables lengths and diameter. The nanowire can be used as potential material for nonlinear optic, optoelectronics and computing devices application and as a prospective nano template for growing other low-dimensional materials systems.

### Acknowledgments

The author acknowledges the financial support from the Ministry of Higher Education of Malaysia under FRGS/1/2019/STG02/UKM/02/3 grant.

### References

- [1] N. Ueda, H. Maeda, H. Hosono, H. Kawazoe, Band-gap widening of CdO thin films, *J. Appl. Phys.* 84, 6174 (1998).
- [2] F.-X. Jiang, H.-Y. Zheng, L.-F. Wang, L.-J. Yan, Y.-N. Wang, X.-Y. Chen, X.-H. Xu, Enhanced photoelectric performance in a CdO/ZnO/Ag heterostructure thin film photoanode, *Vacuum* 185, 109951 (2020).
- [3] S. Majumder, A.C. Mendhe, D. Kim, B.R. Sankapal, CdO nanonecklace: Effect of air annealing on performance of photo electrochemical cell, *J. Alloys Compd.* 788, 75 (2019).
- [4] S.T. Tan, N. AlZayed, G. Lakshminarayana, F. Naumar, A.A. Umar, M. Oyama, G. Myronchuk, I. Kityk, Laser stimulated electrooptics in the Ag–ZnO nanorods, *Physica E* 61, 23 (2014).
- [5] V. Ganesh, L. Haritha, H.E. Ali, A.M. Aboaraia, Y. Khairy, H.H. Hegazy, V. Butova, A.V. Soldatov, H. Algarni, H.Y. Zahran, I.S. Yahia, Detailed investigation of optical linearity and

nonlinearity of nanostructured Ce-doped CdO thin films using Kramers–Kronig relations, *Appl. Phys. A* 126, 551 (2020).

[6] Y. Wang, M. Chen, Y. Li, Q. Du, Y. Yuan, Y. Ren, B. Liu, H. Zhao, H. Yang, Enhancing gas sensitivity of CdO octahedrons having {111} facets by hydrogenation and sensing mechanism of 3-coordinated Cd atoms as the reactive centers, *Appl. Surf. Sci.* 506, 144868 (2020).

[7] Y. Rane, D. Shende, M. Raghuvanshi, R. Koli, S. Gosavi, N. Deshpande, Visible-light assisted CdO nanowires photocatalyst for toxic dye degradation studies, *Optik* 179, 535 (2019).

[8] A. Gulino, G. Compagnini, A.A. Scalisi, Large third-order nonlinear optical properties of cadmium oxide thin films, *Chem. Mater.* 15, 3332 (2003).

[9] Q. Chang, C. Chang, X. Zhang, H. Ye, G. Shi, W. Zhang, Y. Wang, X. Xin, Y. Song, Enhanced optical limiting properties in suspensions of CdO nanowires, *Opt. Commun.* 274, 201 (2007).

[10] L. Vayssieres, Growth of arrayed nanorods and nanowires of ZnO from aqueous solutions, *Adv. Mater.* 15, 464 (2003).

[11] V. Kondalkar, R. Kharade, S. Mali, R. Mane, P. Patil, P. Patil, S. Choudhury, P. Bhosale, Nanobrick-like WO<sub>3</sub> thin films: Hydrothermal synthesis and electrochromic application, *Superlattices Microstruct.* 73, 290 (2014).

[12] V. Subramanian, H. Zhu, R. Vajtai, P. Ajayan, B. Wei, Hydrothermal synthesis and pseudocapacitance properties of MnO<sub>2</sub> nanostructures, *J. Phys. Chem. B* 109, 20207 (2005).

[13] R. Laudise, A. Ballman, Hydrothermal synthesis of zinc oxide and zinc sulfide, *J. Phys. Chem.* 64, 688 (1960).

- [14] S.T. Tan, A.A. Umar, M.M. Salleh, (001)-Faceted hexagonal ZnO nanoplate thin film synthesis and the heterogeneous catalytic reduction of 4-nitrophenol characterization, *J. Alloys Compd.* 650, 299 (2015).
- [15] S. Ghosh, M. Saha, S. Paul, S. De, Shape controlled plasmonic Sn doped CdO colloidal nanocrystals: a synthetic route to maximize the figure of merit of transparent conducting oxide, *Small* 13, 1602469 (2017).
- [16] M. Terpstra, B. Craven, R. Stewart, Hexamethylenetetramine at 298 K: New refinements, *Acta Crystallogr. Sect. A: Found. Crystallogr.* 49, 685 (1993).
- [17] M.I.A. Umar, F.Y. Naumar, M.M. Salleh, A.A. Umar, Hydrothermally grown of well-aligned ZnONRs: dependence of alignment ordering upon precursor concentration, *J. Mater. Sci.: Mater. Electron.* 29, 6892 (2018).
- [18] A.A. Umar, M. Rahman, S. Saad, M. Salleh, M. Oyama, Preparation of grass-like TiO<sub>2</sub> nanostructure thin films: effect of growth temperature, *Appl. Surf. Sci.* 270, 109 (2013).

[Click here to view linked References](#)

## Synthesis of large-scale cadmium oxide nanowires from an aqueous solution

Marjoni Imamora Ali Umar<sup>1\*</sup> and Akrajas Ali Umar<sup>2\*</sup>

<sup>1</sup>Department of Physics Education, Faculty of Tarbiyah, Institut Agama Islam Negeri (IAIN)  
Batusangkar, 27213 Batusangkar, West Sumatera, Indonesia.

<sup>2</sup>Institute of Microengineering and Nanoelectronics, Universiti Kebangsaan Malaysia, 43600  
UKM Bangi, Selangor, Malaysia.

\*Corresponding Author: marjoniimamora@gmail.com (MIAU), akrajas@ukm.edu.my (AAU)

### Abstract.

We report on a simple and template-less technique for growing ultra-long cadmium oxide (CdO) nanowires on the indium tin oxide (ITO) surface from the aqueous solution. The nanowires, free-standing and has a various diameter, are realized on the ITO surface by following a simple hydrothermal reaction of cadmium nitrate and hexamethylenetetramine of a similar molar ratio at 120 °C. The nanowires have a diameter in the range of 10 to 30 nm and a length of up to a few tens of micrometers. We identified that the concentration of the solution precursors is crucial to the growth density of the nanowires on the surface but less important to the structural growth (length and geometry) of the nanowires. Such nanowires might possess unique properties that can be used for prospective photonics and optoelectronics materials.

Keywords: Crystal growth; Nanocrystalline materials; Microstructure; Electronic materials.

### 1. Introduction

Cadmium oxide (CdO) is a fascinating transition metal oxide material with a wide direct electronic bands gap at room temperature, i.e. reaching 2.27 eV (contributed by Cd 5s and O

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

$2p$  transition and indirect electronics band gap of 0.55eV (associated with the Cd 4s and O 2p transition) [1]. CdO is a third member in the class of post-transition metal oxides following the series of SnO<sub>2</sub> and In<sub>2</sub>O<sub>3</sub> and the second member following the series of ZnO, which exhibits appealing electrical and optical properties [2]. In the past decade, it has developed into a center of scientific interest owing to its attractive optical properties [3] and large optical third-order nonlinearity character [4], which is potential for optoelectronics, solar cells [5], gas sensors [6], and photocatalysis [7] applications.

There is a growing concern to explore the fascinating nature of this material, especially related to its low-dimensional (1D or 2D) characteristics. Gulino *et al.*, for instance, investigated the electrical and the optical nonlinearity of the CdO when prepared in the form of thin films (2D) system [8]. They found that they greatly improved the optical nonlinearity properties of the CdO when the CdO was prepared as thin films. They attributed such pieces of evidence to the profound effect of crystal symmetry orientation transformation in CdO, especially from centrosymmetric of bulk structure to polar symmetry of thin films structure, which might generate the improvement in their third-order optical nonlinearity. Such results are fascinating and may provide a principal idea to explore the properties of the CdO, in specific when their structural growth is constrained into nanowires structure. There has been an increasing enthusiasm in the preparation and analysis of 1D CdO nanostructure [9]. However, to our best knowledge, to date, few experimental studies reported the growth of CdO nanowires directly on the substrate surface. Since the properties of the material at a reduced-dimension regime greatly depends on their geometrical growth (quantum size effect) and the surrounding medium, an upgraded characteristic and broader application of the CdO nanostructure could be achieved when it is prepared directly on the substrate surface.

In this communication, we present for the first time a simple, seedless, surfactant-less approach to grow CdO nanowires on an indium tin oxide (ITO) surface. By adopting a

1 hydrothermal reaction between the cadmium nitrate pentahydrate and hexamethylenetetramine  
2 at 120 °C for several hours, we can grow a large scale of CdO nanowires on the substrate  
3 surface. The present approach is extremely simple and rapid to realize large-scale nanowires  
4 on the substrate surface. It has been widely reported that the hydrothermal is a versatile method  
5 to prepare a wide variety of metaloxide nanostructure that range from ZnO [10] to WO<sub>3</sub> [11],  
6 MnO<sub>2</sub> [12], and ZnS [13]. The specialty of the present study is that we realized the nanowires  
7 on the substrate via effective sequential nucleation and growth on the substrate surface, instead  
8 of seed-assisted growth process as adopted in the recent literatures [14, 15]. The CdO  
9 nanowires should find application in solar cells, optoelectronics and sensing devices.  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20


## 21 **2. Experimental**

22 In preparing CdO nanowires, we simply used two chemicals, i.e. cadmium nitrate and  
23 hexamethylenetetramine. Cadmium nitrate pentahydrate (Cd(NO<sub>3</sub>)<sub>2</sub>·5H<sub>2</sub>O) and  
24 hexamethylenetetramine (HMT) were purchased from Aldrich Chemical and used directly  
25 without further purification. We prepared an aqueous solution of these chemicals utilizing  
26 ultrapure water obtained from Autopure WR600A, Yamato Co., Ltd with resistivity > 18.2  
27 MΩ. In a typical experimental procedure, we prepared a 0.1 M mixed solution of Cd(NO<sub>3</sub>)<sub>2</sub>  
28 and HMT with a 1:1 molar ratio and then transferred a 5 mL of the solution into a clean glass  
29 test tube for the growth process.  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43

44 A piece of ultrasonicated-clean ITO on a glass substrate with a dimension of ca. 1 cm x 1cm  
45 was then put into the solution with a vertical position. The reaction was controlled at 120 °C  
46 for 2 h by transferring the solution into a regular laboratory oven. After the reaction complete,  
47 a white film product on the ITO surface was attained. After that, we washed the sample with a  
48 copious amount of pure water to remove any residual salt on the surface and dried for 30 min  
49 in air at 100 °C.  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65


### 3. Results and discussion.

1  
2 We have grown the CdO nanowires on the ITO substrate surface. The field emission  
3  
4 scanning electron microscopy (FESEM), JSF 7400F JEOL, Japan, was used to study the  
5  
6 structural growth of the nanowires. Figure 1 shows a typical FESEM image of CdO nanowires  
7  
8 prepared from the 0.1 M precursor solution that was grown for 2 h. We found that a large  
9  
10 number, very long CdO nanowires were successfully realized on the ITO surface (Fig. 1A).  
11  
12 The high-magnification image of the CdO nanowires reveals the nanowires possess a variable  
13  
14 diameter between 10 to 30 nm and length in the range of tens of micrometers (Fig. 1B). It was  
15  
16 also observed that the vast majority of the nanowires were free standing without the existence  
17  
18 of collision or branching. We performed an X-ray diffraction (XRD) experiments on the sample  
19  
20 to evaluate its phase crystallinity. The result is shown in Figure 1C. The diffraction pattern is  
21  
22 well-matched with the standard diffraction data for CdO (JCPDS File no 05-0640) and we can  
23  
24 associate the obtained peaks with (200), (220), (311) and (222) Bragg planes, confirming the  
25  
26 sample is a pure phase CdO. Along with the CdO diffraction peaks, the result also indicates  
27  
28 the presence of diffraction from the substrate background.  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

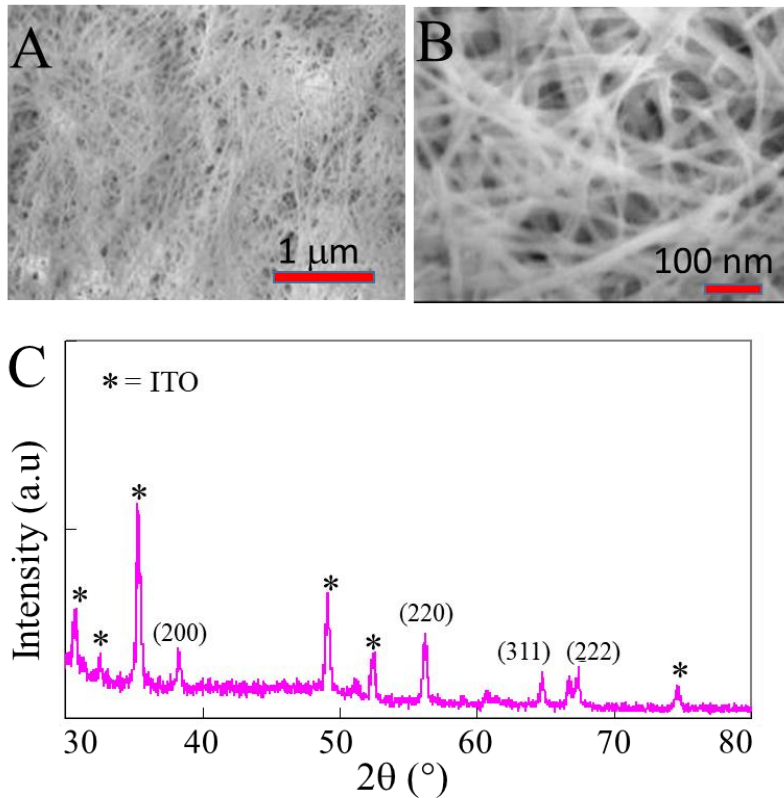

**Figure 1. (A-B)** Typical FESEM image of CdO nanowires growth on the ITO surface using precursor concentration of 0.1 M. The ratio between cadmium nitrate and HMT is 1:1. (C) X-ray diffraction spectrum of CdO nanowires.

The effect of precursor concentration on the structural growth of CdO nanowires under a constant molar ratio between  $\text{Cd}(\text{NO}_3)_2$  and HMT was also carried out. We observed that the concentration of the solution precursors seemed to have no significant effect on the structural growth of the CdO nanowires. Instead, the density of the nanowires on the surface decreased with decreasing the concentration of the solution precursor instead (Fig. 2). We also found that the diameter of the nanowires decrease with the decrease of the concentration of the source solution.

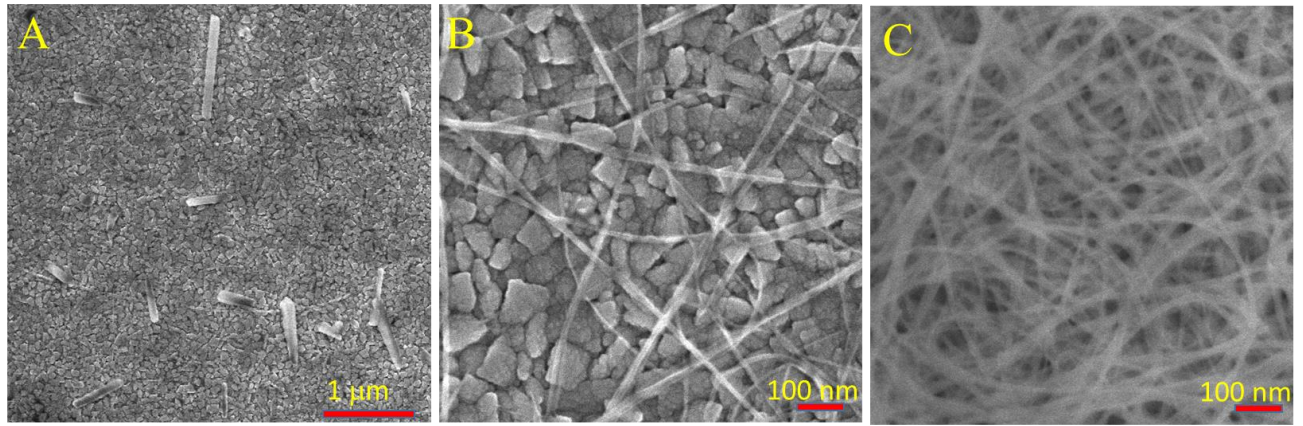

**Figure 2.** Typical FESEM image of CdO nanowires growth on the ITO surface prepared using different solution concentrations; namely 0.001 (A), 0.004 (B), and 0.1 M (C). The molar ratio between the reagents in the solution was kept unchanged. The growth reaction was 2 h.

While the structural growth is independent of the total precursors' concentration under a fixed ratio, it shows a strong dependence on the HMT concentration in the reaction. Under a fixed cadmium nitrate concentration, i.e. 0.1 M, the CdO nanostructures growth increases in the compactness and dimension with the increase of HMT concentration (Fig. 3). At a low HMT concentration, for example, 0.02 M, the morphology of the CdO nanostructure was rod-like shaped structure (Fig. 3A). It then changed to belt-like structures and then finally to nanowires with the increase of the HMT concentration (Fig. 3B-D).

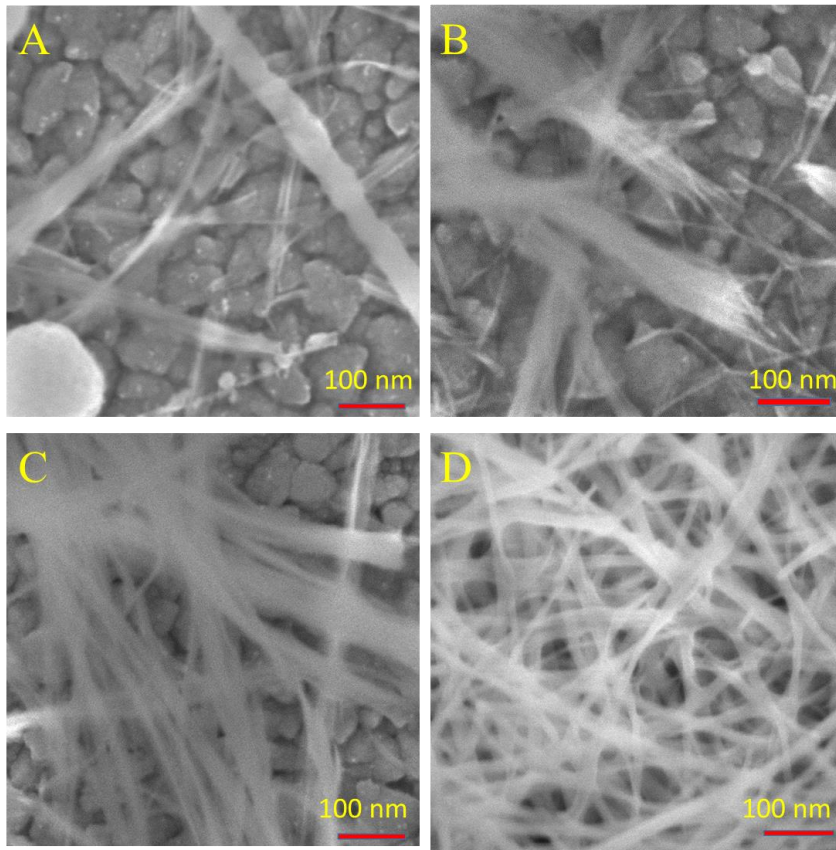


Figure 3. Structural growth of CdO nanowires under different HMT concentration. (A) 0.02, (B) 0.05, (C) 0.07 and (D) 0.1 M. Cadmium nitrate was fixed at 0.1 M. The growth reaction was 2 h.

We also evaluated the nanostructure byproduct that were grown in the bulk solution to further verify the nanowires formation is merely because of the unique crystal growth process on the substrate surface. The result is shown in Figure 4. As the figure reveals, the product are irregular-shape nanostructures. The FESEM analysis results also indicate the formation of big and micro-sized structure in the byproduct that is formed in the bulk solution.

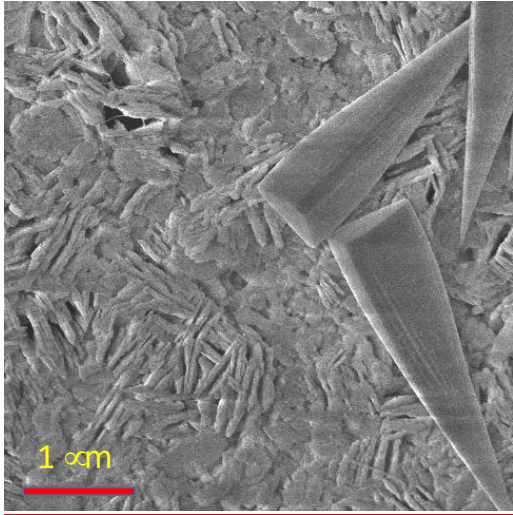


Figure 4. FESEM image of nanostructures byproduct that are formed in the bulk solution.

We believe that the mechanism behind the formation of CdO nanowires is the result of a profound effect of HMT in the reaction. Under a high-temperature hydrothermal reaction, the metal cations were reduced from the cadmium salt precursor and coordinated with oxygen to creating the cadmium oxide. In this process, we predict that the anisotropic growth of CdO system might be because of a stacking effect of the reduced-metal cations toward the principal axis of the CdO crystal, driven by an ample amount of tetradentate amine-metal complex of HMT in the solution. HMT is a cage-like molecule that has a high-symmetry characteristic of cubic space group  $I\bar{4}3m$  [16] with a repeating unit of three atoms fragment of C-NH at the molecular body. Because of the inherent high-affinity nature of the amine group toward metal atoms, it may function as nucleation sites for the reduced-metal systems and directing agent for 1D crystal growth. A similar process has been shown in the synthesis of the 1D system of ZnO [17] and TiO<sub>2</sub> [18] systems.

#### 4. Conclusions

We pointed out that large-scale CdO nanowires of micrometers length can be easily synthesized by applying a simple hydrothermal reaction of cadmium nitrate and

1 hexamethylenetetramine of similar molar ratio at a moderate high-temperature, 120 °C. By  
2 varying the concentration of the solution precursors, we can synthesize nanowires with  
3 variables lengths and diameter. The nanowire can be used as potential material for nonlinear  
4 optic, optoelectronics and computing devices application and as a prospective nano template  
5 for growing other low-dimensional materials systems.  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16

### 17 **Acknowledgments**

18  
19  
20 The author acknowledges the financial support from the Ministry of Higher Education of  
21 Malaysia under FRGS/1/2019/STG02/UKM/02/3 grant.  
22  
23  
24  
25

### 26 **References**

- 27  
28  
29 [1] N. Ueda, H. Maeda, H. Hosono, H. Kawazoe, Band-gap widening of CdO thin films, J.  
30 Appl. Phys. 84, 6174 (1998).  
31  
32  
33 [2] F.-X. Jiang, H.-Y. Zheng, L.-F. Wang, L.-J. Yan, Y.-N. Wang, X.-Y. Chen, X.-H. Xu,  
34 Enhanced photoelectric performance in a CdO/ZnO/Ag heterostructure thin film photoanode,  
35 Vacuum 185, 109951 (2020).  
36  
37 [3] S. Majumder, A.C. Mendhe, D. Kim, B.R. Sankapal, CdO nanonecklace: Effect of air  
38 annealing on performance of photo electrochemical cell, J. Alloys Compd. 788, 75 (2019).  
39  
40 [4] S.T. Tan, N. AlZayed, G. Lakshminarayana, F. Naumar, A.A. Umar, M. Oyama, G.  
41 Myronchuk, I. Kityk, Laser stimulated electrooptics in the Ag–ZnO nanorods, Physica E 61,  
42 23 (2014).  
43  
44 [5] V. Ganesh, L. Haritha, H.E. Ali, A.M. Aboraia, Y. Khairy, H.H. Hegazy, V. Butova, A.V.  
45 Soldatov, H. Algarni, H.Y. Zahran, I.S. Yahia, Detailed investigation of optical linearity and  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

1 nonlinearity of nanostructured Ce-doped CdO thin films using Kramers–Kronig relations,  
2 Appl. Phys. A 126, 551 (2020).  
3

4 [6] Y. Wang, M. Chen, Y. Li, Q. Du, Y. Yuan, Y. Ren, B. Liu, H. Zhao, H. Yang, Enhancing  
5 gas sensitivity of CdO octahedrons having {111} facets by hydrogenation and sensing  
6 mechanism of 3-coordinated Cd atoms as the reactive centers, Appl. Surf. Sci. 506, 144868  
7 (2020).  
8  
9

10 [7] Y. Rane, D. Shende, M. Raghuvanshi, R. Koli, S. Gosavi, N. Deshpande, Visible-light  
11 assisted CdO nanowires photocatalyst for toxic dye degradation studies, Optik 179, 535  
12 (2019).  
13

14 [8] A. Gulino, G. Compagnini, A.A. Scalisi, Large third-order nonlinear optical properties of  
15 cadmium oxide thin films, Chem. Mater. 15, 3332 (2003).  
16

17 [9] Q. Chang, C. Chang, X. Zhang, H. Ye, G. Shi, W. Zhang, Y. Wang, X. Xin, Y. Song,  
18 Enhanced optical limiting properties in suspensions of CdO nanowires, Opt. Commun. 274,  
19 201 (2007).  
20



21 [10] L. Vayssieres, Growth of arrayed nanorods and nanowires of ZnO from aqueous solutions,  
22 Adv. Mater. 15, 464 (2003).  
23


24 [11] V. Kondalkar, R. Kharade, S. Mali, R. Mane, P. Patil, P. Patil, S. Choudhury, P. Bhosale,  
25 Nanobrick-like WO<sub>3</sub> thin films: Hydrothermal synthesis and electrochromic application,  
26 Superlattices Microstruct. 73, 290 (2014).  
27


28 [12] V. Subramanian, H. Zhu, R. Vajtai, P. Ajayan, B. Wei, Hydrothermal synthesis and  
29 pseudocapacitance properties of MnO<sub>2</sub> nanostructures, J. Phys. Chem. B 109, 20207 (2005).  
30


31 [13] R. Laudise, A. Ballman, Hydrothermal synthesis of zinc oxide and zinc sulfide<sup>1</sup>, J. Phys.  
32 Chem. 64, 688 (1960).  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

- 1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65
- [14] S.T. Tan, A.A. Umar, M.M. Salleh, (001)-Faceted hexagonal ZnO nanoplate thin film synthesis and the heterogeneous catalytic reduction of 4-nitrophenol characterization, *J. Alloys Compd.* 650, 299 (2015).
- [15] S. Ghosh, M. Saha, S. Paul, S. De, Shape controlled plasmonic Sn doped CdO colloidal nanocrystals: a synthetic route to maximize the figure of merit of transparent conducting oxide, *Small* 13, 1602469 (2017).
- [16] M. Terpstra, B. Craven, R. Stewart, Hexamethylenetetramine at 298 K: New refinements, *Acta Crystallogr. Sect. A: Found. Crystallogr.* 49, 685 (1993).
- [17] M.I.A. Umar, F.Y. Naumar, M.M. Salleh, A.A. Umar, Hydrothermally grown of well-aligned ZnONRs: dependence of alignment ordering upon precursor concentration, *J. Mater. Sci.: Mater. Electron.* 29, 6892 (2018).
- [18] A.A. Umar, M. Rahman, S. Saad, M. Salleh, M. Oyama, Preparation of grass-like TiO<sub>2</sub> nanostructure thin films: effect of growth temperature, *Appl. Surf. Sci.* 270, 109 (2013).

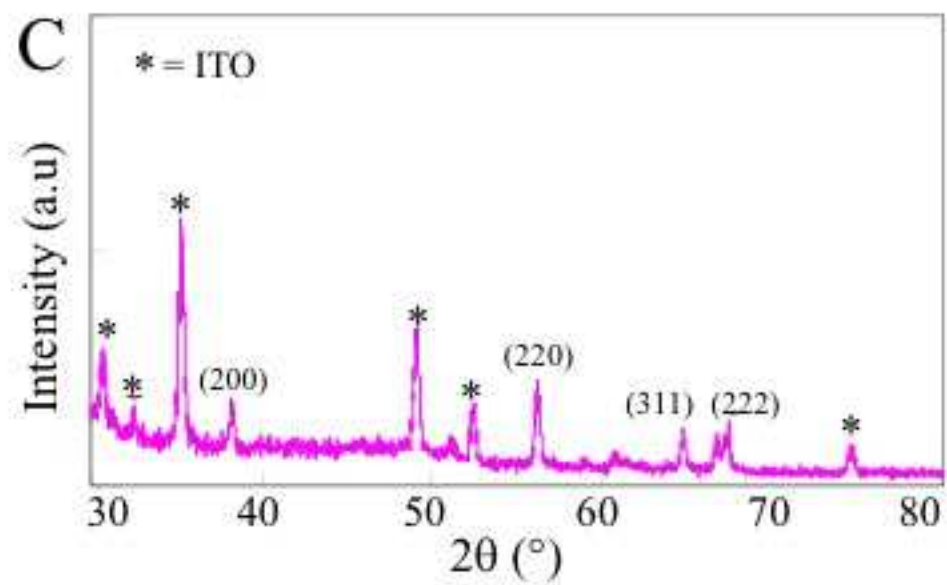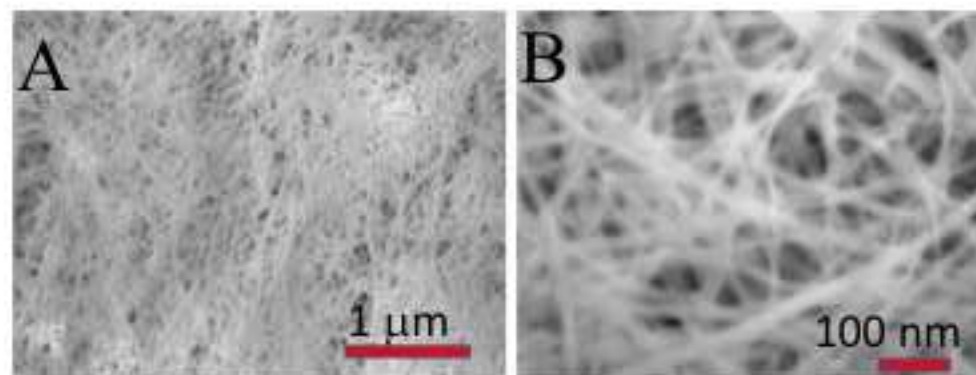

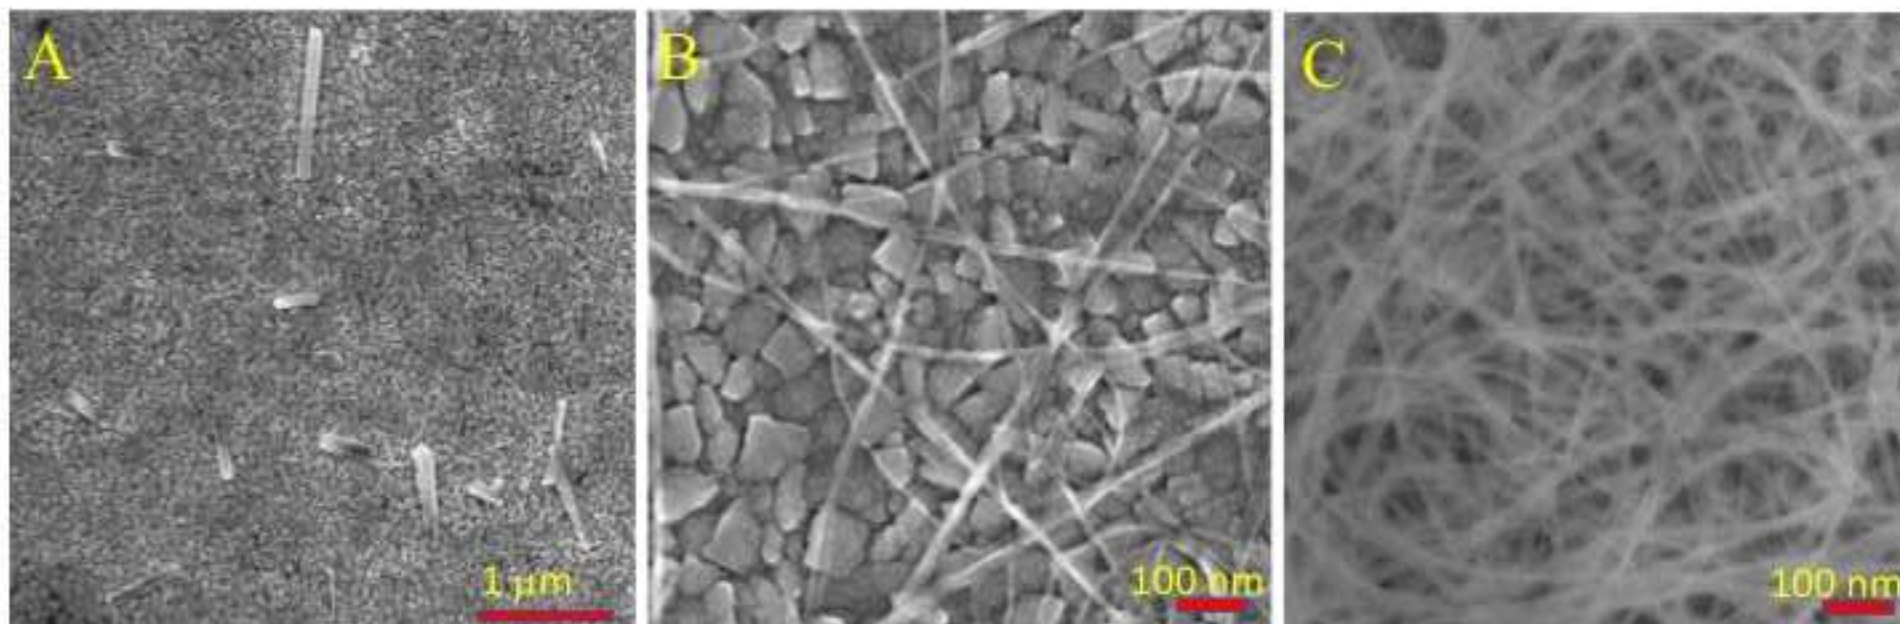

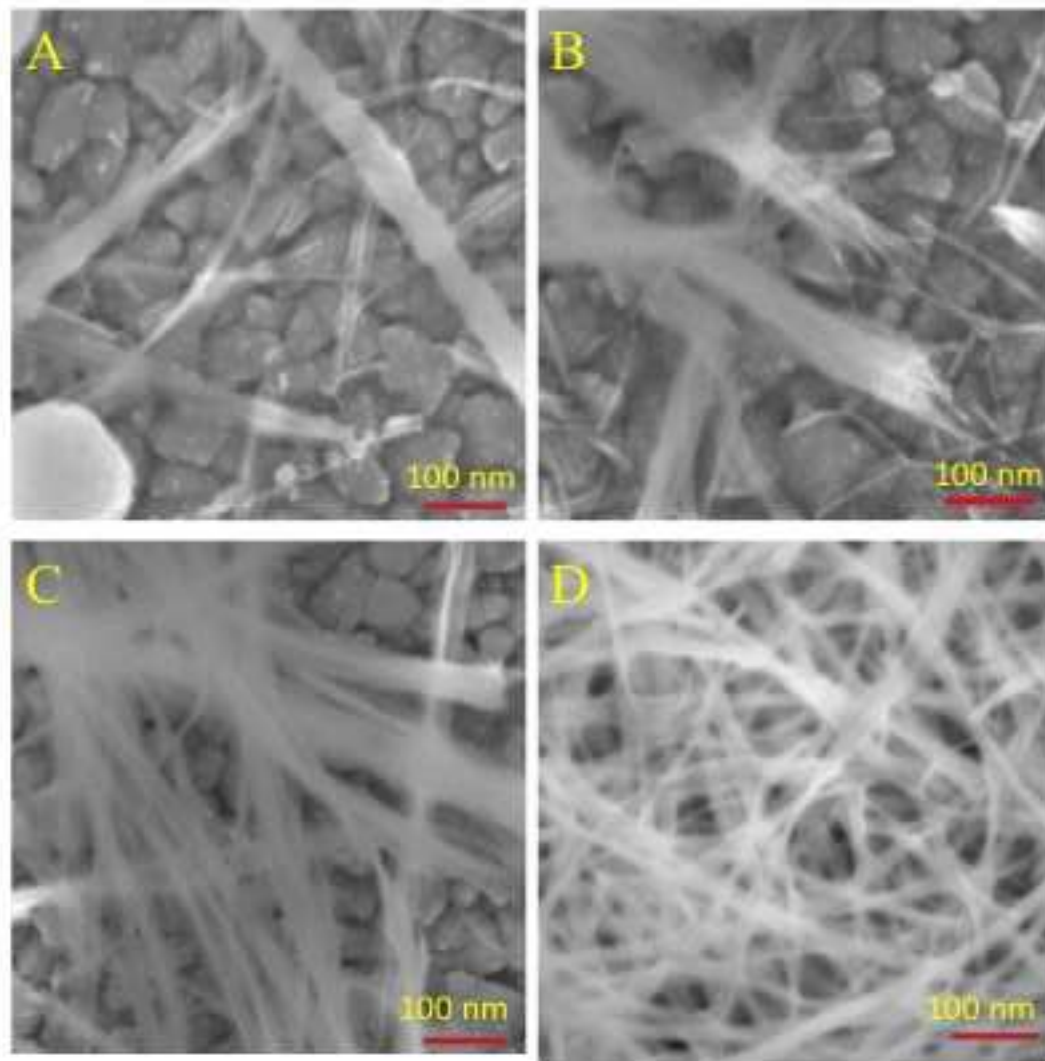

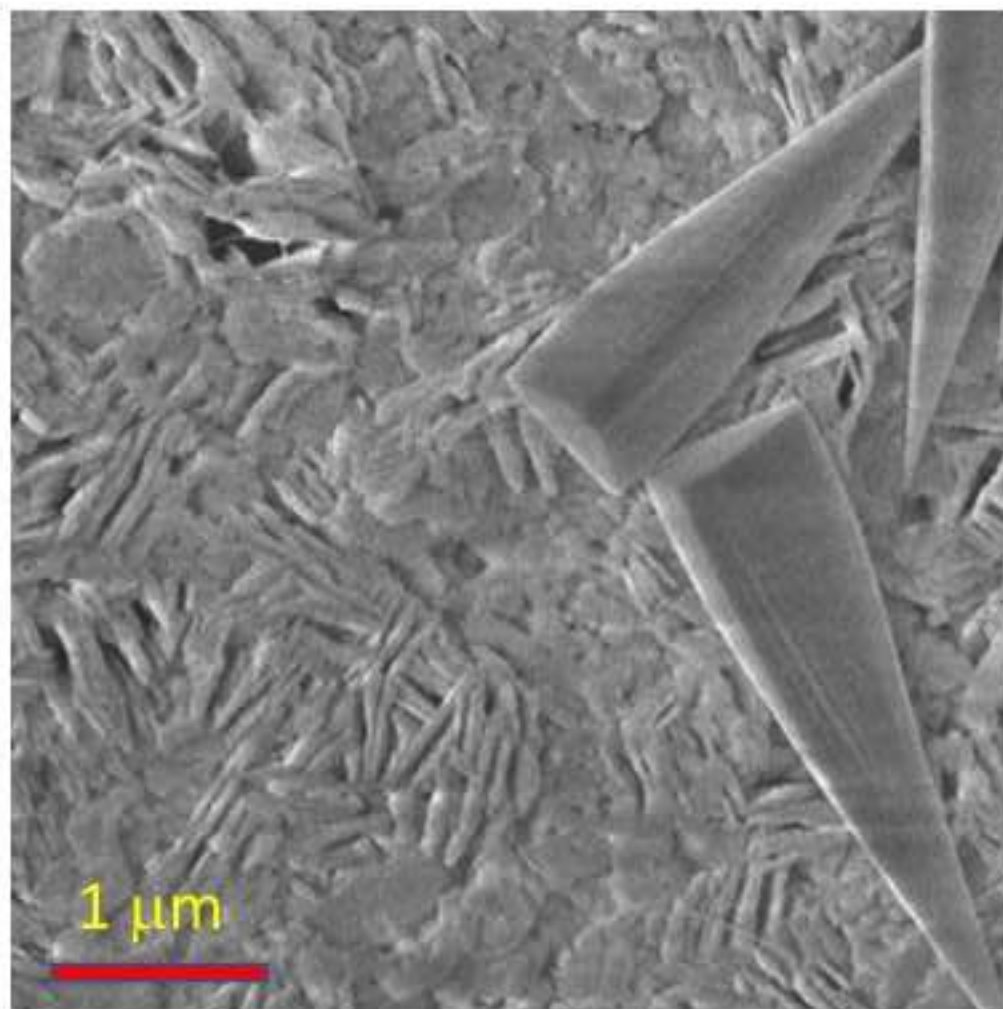

**History for Manuscript Number: JEMS-D-21-00730**  
**Marjoni Imamora Ali Umar (INDONESIA): "Synthesis of large-scale cadmium oxide nanowires from an aqueous solution"**

Close

**Correspondence History**

Correspondence Date ▲ ▼	Letter ▲ ▼	Recipient ▲ ▼	Revision ▲ ▼
14 Jul 2021	<a href="#">Editor Decision - Accept as Is</a>	Marjoni Imamora Ali Umar	3
12 Jul 2021	<a href="#">Acknowledge Receipt of Revision</a>	Marjoni Imamora Ali Umar	3
12 Jul 2021	<a href="#">PDF Built</a>	Marjoni Imamora Ali Umar	3
12 Jul 2021	<a href="#">Editor Decision-Format Correction After PeerReview</a>	Marjoni Imamora Ali Umar	2
09 Jul 2021	<a href="#">Acknowledge Receipt of Revision</a>	Marjoni Imamora Ali Umar	2
09 Jul 2021	<a href="#">PDF Built</a>	Marjoni Imamora Ali Umar	2
07 Jul 2021	<a href="#">Editor Decision-Format Correction After PeerReview</a>	Marjoni Imamora Ali Umar	1
29 Jun 2021	<a href="#">PDF Built</a>	Marjoni Imamora Ali Umar	1
29 Jun 2021	<a href="#">AU - Return Submission (Customize)</a>	Marjoni Imamora Ali Umar	1
28 Jun 2021	<a href="#">Acknowledge Receipt of Revision</a>	Marjoni Imamora Ali Umar	1
28 Jun 2021	<a href="#">PDF Built</a>	Marjoni Imamora Ali Umar	1
21 Jun 2021	<a href="#">Editor Decision - Minor Revision</a>	Marjoni Imamora Ali Umar	0
03 May 2021	<a href="#">PDF Built</a>	Marjoni Imamora Ali Umar	0
03 May 2021	<a href="#">AU - Return Submission (Customize)</a>	Marjoni Imamora Ali Umar	0
30 Apr 2021	<a href="#">AU - Submission Confirmation</a>	Marjoni Imamora Ali Umar	0
30 Apr 2021	<a href="#">PDF Built</a>	Marjoni Imamora Ali Umar	0

Close

**Date:** 30 Apr 2021  
**To:** "Marjoni Imamora Ali Umar" marjoniimamora@gmail.com  
**From:** "Journal of Electronic Materials (JEMS)" jebamalar.jayapal@springernature.com  
**Subject:** JEMS - Submission Confirmation

Dear Dr Ali Umar,

Thank you for submitting your manuscript, Synthesis of large-scale cadmium oxide nanowires from an aqueous solution, to Journal of Electronic Materials.

During the review process, you can keep track of the status of your manuscript by accessing the journal's website.

Your username is: \*\*\*\*\*

If you forgot your password, you can click the 'Send Login Details' link on the EM Login page at <https://www.editorialmanager.com/jems/>

Should you require any further assistance please feel free to e-mail the Editorial Office by clicking on "Contact Us" in the menu bar at the top of the screen.

Thank you very much.

With kind regards,  
Springer Journals Editorial Office  
Journal of Electronic Materials

Now that your article will undergo the editorial and peer review process, it is the right time to think about publishing your article as open access. With open access your article will become freely available to anyone worldwide and you will easily comply with open access mandates. Springer's open access offering for this journal is called Open Choice (find more information on [www.springer.com/openchoice](http://www.springer.com/openchoice)). Once your article is accepted, you will be offered the option to publish through open access. So you might want to talk to your institution and funder now to see how payment could be organized; for an overview of available open access funding please go to [www.springer.com/oafunding](http://www.springer.com/oafunding). Although for now you don't have to do anything, we would like to let you know about your upcoming options.

**\*\*Our flexible approach during the COVID-19 pandemic\*\***

If you need more time at any stage of the peer-review process, please do let us know. While our systems will continue to remind you of the original timelines, we aim to be as flexible as possible during the current pandemic.

This letter contains confidential information, is for your own use, and should not be forwarded to third parties.

Recipients of this email are registered users within the Editorial Manager database for this journal. We will keep your information on file to use in the process of submitting, evaluating and publishing a manuscript. For more information on how we use your personal details please see our privacy policy at <https://www.springernature.com/production-privacy-policy>. If you no longer wish to receive messages from this journal or you have questions regarding database management, please contact the Publication Office at the link below.

---

In compliance with data protection regulations, you may request that we remove your personal registration details at any time. (Use the following URL: <https://www.editorialmanager.com/jems/login.asp?a=r>). Please contact the publication office if you have any questions.

**Date:** 21 Jun 2021  
**To:** "Marjoni Imamora Ali Umar" marjoniimamora@gmail.com  
**From:** "Journal of Electronic Materials (JEMS)" jebamalar.jayapal@springernature.com  
**Subject:** Decision on your Manuscript #JEMS-D-21-00730

Date:  
21 Jun 2021

Manuscript ID:  
JEMS-D-21-00730

Dear Dr Ali Umar,

We have received the reviewer comments on your manuscript Synthesis of large-scale cadmium oxide nanowires from an aqueous solution, which was submitted to the Journal of Electronic Materials

Based on the advice received, your manuscript could be accepted for publication if you incorporate minor revisions. Please submit a list of changes and your responses to each of the reviewer comments as a 'Response to Reviewers' file in the resubmission menu. Also, please upload your revised manuscript with the changes highlighted in the file inventory as a 'Marked Manuscript' in the resubmission menu. Finally, upload a clean version (unmarked source file) of your manuscript under the 'Manuscript' part of the resubmission menu.

Using these uploaded files, the editor will decide if the revised manuscript requires assessment by the original or new reviewers and if the revised manuscript can be accepted.

Your revised manuscript is due on 21 Jul 2021. If you require more time, please request an extension of the due date. Extensions will be considered on a case-by-case basis.

After the deadline, any new version of the manuscript should be submitted as a new paper. Note that if your submission is part of a topical collection—for example, part of a group of papers attached to a particular conference—it is important that your revision be submitted by the due date. Late submissions may not appear in the same issue as the other papers from the collection.

In order to submit your revised manuscript electronically, please access the journal website at <https://www.editorialmanager.com/jems/>  
Your username is: \*\*\*\*\*

If you forgot your password, you can click the 'Send Login Details' link on the EM Login page at <https://www.editorialmanager.com/jems/>

Click 'Author Login' to submit your revision.

We look forward to receiving your revised manuscript.

Best regards,  
Jamie Buonato  
Journal of Electronic Materials

#### COMMENTS TO THE AUTHOR:

Thank you for your submission to JEMS. I have now received the reviewer reports, which are attached/copied below. I have carefully evaluated your manuscript and the reviewers' reports, and the reports indicate that the manuscript cannot be accepted in its current form, but minor revisions are necessary.

Please submit a revised manuscript which addresses all of the reviewers' comments. When you submit your revised manuscript please include a point by point response to the reviewers' comments and highlight/color the changes you have made. Please include the figures at the appropriate place in the text too.

Reviewer #1: I recommend the publication of this paper.

Reviewer #2: The authors successfully synthesized CdO nanowires by solvothermal method. However, they failed to provide evidences of their major claims of synthesizing large scale of nanowires and that the growth occurred on a substrate. What could have happened is that the growth occurred in the solvent and then stick to substrate surface due to the high surface energy of the nanowires.

CdO nanowires has been synthesized by many researchers and therefore this manuscript can't be considered as original research.

1. Applied Surface Science 254 (2008) 3269-3273.
2. Nanoscale Res Lett (2010) 5:961-965.
3. AIP ADVANCES 3 (2013), 052109,1-6.
4. J. Phys. D: Appl. Phys. 35 (2002) L101-L104.
5. Crys. Growth Des. 2009; 9(3): 1287-1292.

## Reviewer #3:

The author has tried successfully to Synthesis of large-scale cadmium oxide nanowires from an aqueous solution. But, before make the final discussion author should revise carefully.

1) In some cases the author has written incorrect construction of sentences. So, revise accordingly.

2) In order to improve the introduction with respect to your material and the proper literature survey author should use some following references for your kind information and cite in the introduction section, .A)V. Kondalkar, R.R. Kharade, S.S. Mali, R.M. Mane, P.B. Patil, P.S. Patil, S. Choudhury, P.N. Bhosale, Superlattices and Microstructures, 73, ( 2014)290-295,

B ) Vijay V. Kondalkar, Sawanta S. Mali, Rohini R. Kharade, Rahul M. Mane, Pramod S. Patil, Chang K. Hong, Jin H. Kim, Sipra Choudhury and Popatrao N. Bhosale, RSC Adv., 2015,5, 26923-26931.

3) While, in introduction author should provide major advantage and the reason behind the selection of particular method.

## Editorial Office Comments:

**\*\*Please upload high-resolution (at least 300 dpi) jpg, tif, or eps files for each figure separately in Editorial Manager. Do not upload your figures in a Word document file.**

**\*\*The English language requires improvements. We recommend you ask a native English speaker to edit the paper or use an independent professional editor. Some editing services are listed here:**

[www.edanzediting.com/springer](http://www.edanzediting.com/springer)

[www.aje.com](http://www.aje.com)

[www.editage.com](http://www.editage.com)

**\*\*Any claims of novelty should make specific reference to what is known, unknown, accomplished and unaccomplished in scientific literature, rather than using words such as "new," "for the first time," "novel," or "best." The latter expressions may only be used if they can be fully substantiated, and, as such, should be avoided in the title, abstract, and conclusion. For example, 'for the first time' in the abstract.**

**\*\*Please use SI units for hours (h), minutes (min), and seconds (s).**

**\*\*References must be numbered and cited in the text. They must be in the style of the journal. This means all author names are cited (et al is not allowed), article titles are listed, journal titles must be correctly abbreviated and must list the opening page number only.**

[Author names, article title. Journal. Volume, page (Year)]

S. Preuss, A. Demchuk Jr., M. Stuke, Sub-picosecond UV laser ablation of metals. Appl. Phys. A 61, 33 (1995).

See the Instructions for Authors here:

[http://www.springer.com/materials/optical+%26+electronic+materials/journal/11664?detailsPage=pltpci\\_2326326](http://www.springer.com/materials/optical+%26+electronic+materials/journal/11664?detailsPage=pltpci_2326326) .

\*\*\*\*\*

\*\*\*\*\*

Prior to resubmission, please make sure your manuscript follows these format requirements papers that don't adhere to these requirements will be sent back for completion and further review will be delayed:

The manuscript and tables have been submitted as Word or LaTeX files. If your source files were prepared using LaTeX, please upload a PDF as the Manuscript file, with the LaTeX file(s) uploaded as Supplementary Material.

Figures have been uploaded as separate high-resolution (at least 300 dpi) image files (EPS, JPG, TIF, or PNG files) that are appropriately named (e.g., Figure 1, Figure 2, etc.). Do not place captions on the figure files.

Figure captions as Word text appear in the manuscript file either under the figures or in a separate list at the end of the manuscript.

All figure parts (a, b, c, etc.) are described by part in the caption for any figures with multiple parts, and all part labels are added to the image files.

All micrographs have scale markers, and all scale markers and text in figures are large enough to be easily read.

If any figures and/or tables are being reprinted from another source, you have noted that in the caption(s) and uploaded copies of the permission documents as the Permission file type. All Permission files must be clearly named to match the figure in the manuscript (e.g., permission for figure 1, permission for figure 2b, etc.).

Color figures are understandable if printed in black and white.

Affiliation information has been provided for all authors, the corresponding author has been identified, and an email address has been provided for the corresponding author on the title page.

Any claims of novelty make specific reference to what is known, unknown, accomplished and unaccomplished in scientific literature, rather than using words such as 'new,' 'for the first time,' 'novel,' or 'best.' The latter expressions may only be used if they can be fully substantiated, and, as such, should be avoided in the title, abstract, and conclusion.

Acronyms are defined on first use in the abstract and again in the body of the manuscript using this style: molecular beam

epitaxy (MBE).

Variables are italicized in equations and in the text.

SI units have been used: (h) for hours, (min) for minutes, and (s) for seconds.

Equations have been numbered in order to the right of the equation with the number in parentheses (1), (2), etc.

All tables and figures have been numbered and cited in order in the text. (Roman numerals are used for table numbers, and Arabic numbers are used for figure numbers.)

References have been formatted in the style of the journal. (See [http://www.springer.com/materials/optical+%26+electronic+materials/journal/11664?detailsPage=pltdci\\_2326326](http://www.springer.com/materials/optical+%26+electronic+materials/journal/11664?detailsPage=pltdci_2326326) for further instructions on reference formatting.)

Please note that all manuscripts are screened for plagiarism upon submission and at least one other time prior to acceptance using iThenticate software to verify the originality of your work. Please be sure that the work you submit is original and all previous work has been cited.

You can use iThenticate to screen your work prior to submission by visiting [www.ithenticate.com](http://www.ithenticate.com).

\*\*\*\*\*

**Authors may need to take specific actions to achieve compliance with funder and institutional open access mandates.** If your research is supported by a funder that requires immediate open access (e.g. according to Plan S principles) then you should select the gold OA route, and we will direct you to the compliant route where possible. For authors selecting the subscription publication route our standard licensing terms will need to be accepted, including our self-archiving policies. Those standard licensing terms will supersede any other terms that the author or any third party may assert apply to any version of the manuscript.

[Find out more about compliance](#)

**\*\*Our flexible approach during the COVID-19 pandemic\*\***

If you need more time at any stage of the peer-review process, please do let us know. While our systems will continue to remind you of the original timelines, we aim to be as flexible as possible during the current pandemic.

This letter contains confidential information, is for your own use, and should not be forwarded to third parties.

Recipients of this email are registered users within the Editorial Manager database for this journal. We will keep your information on file to use in the process of submitting, evaluating and publishing a manuscript. For more information on how we use your personal details please see our privacy policy at <https://www.springernature.com/production-privacy-policy>. If you no longer wish to receive messages from this journal or you have questions regarding database management, please contact the Publication Office at the link below.

---

In compliance with data protection regulations, you may request that we remove your personal registration details at any time. (Use the following URL: <https://www.editorialmanager.com/jems/login.asp?a=r>). Please contact the publication office if you have any questions.

**Date:** 07 Jul 2021  
**To:** "Marjoni Imamora Ali Umar" marjoniimamora@gmail.com  
**From:** "Jamie Buonato" jamie.buonato@kwfco.com  
**Subject:** Decision on your Manuscript #JEMS-D-21-00730R1

Date:  
07 Jul 2021

Manuscript ID:  
JEMS-D-21-00730R1

Dear Dr Ali Umar:

We have received the reports on your manuscript, 'Synthesis of large-scale cadmium oxide nanowires from an aqueous solution', which you submitted to Journal of Electronic Materials.

We are pleased to inform you that your manuscript is nearing acceptance and has received favorable reviews. So that we may accept your article for production, please address the issues noted below by 12 Jul 2021. If you require more time, please request an extension of the due date.

**\*\*References may NOT be combined.** For example, reference 14 has parts (a) and (b). Each reference must be cited and numbered separately. Many of your references are not in the style of the journal. This means all author names are cited (et al is not allowed), article titles are listed, journal titles must be correctly abbreviated and must list the opening page number only. Please check all references carefully.

[Author names, article title. Journal. Volume, page (Year)]

S. Preuss, A. Demchuk Jr., M. Stuke, Sub-picosecond UV laser ablation of metals. Appl. Phys. A 61, 33 (1995).

See the Instructions for Authors here:

[http://www.springer.com/materials/optical+%26+electronic+materials/journal/11664?detailsPage=pltdci\\_2326326](http://www.springer.com/materials/optical+%26+electronic+materials/journal/11664?detailsPage=pltdci_2326326) .

Your revised version should be submitted along with a list of corrections (excluding grammatical) to the most recent version. Your paper can only be sent to production without delay if we have all source files on hand. Submissions without source files will be returned prior to final acceptance.

Please submit a list of changes excluding specific grammatical corrections under the 'Response to Reviewers' part of the resubmission menu. Also, upload your revised manuscript with the changes highlighted under the 'Marked Manuscript' part of the resubmission menu. Upload a clean version (unmarked source file) of your manuscript under the 'Manuscript' part of the resubmission menu. Note that the clean version uploaded as the 'Manuscript' file must be the revised, final version of your paper that contains all of your changes. This version will be sent to the Publisher.

Note that if your submission is part of a topical collection—for example, part of a group of papers attached to a particular conference—it is important that your revision be submitted by the due date. Late submissions may not appear in the same issue as the other papers from the collection.

In order to submit your revised manuscript electronically, please access the journal website at <https://www.editorialmanager.com/jems/>

Your username is: \*\*\*\*\*

If you forgot your password, you can click the 'Send Login Details' link on the EM Login page at <https://www.editorialmanager.com/jems/>

Please click 'Author Login' to submit your revision.

We look forward to receiving your revised manuscript.

Best regards,  
Jamie Buonato  
Journal of Electronic Materials

COMMENTS FOR THE AUTHOR:

Thank you for submitting your revised manuscript to JEMS. After considering the comments from the editors/reviewers, I am pleased to accept your manuscript for publication in its current form. I have copied any final comments from the reviewer(s) below.

—

\*\*\*\*\*

**Authors may need to take specific actions to achieve compliance with funder and institutional open access mandates.** If your research is supported by a funder that requires immediate open access (e.g. according to Plan S principles) then you should select the gold OA route, and we will direct you to the compliant route where possible. For authors selecting the subscription publication route our standard licensing terms will need to be accepted, including our

self-archiving policies. Those standard licensing terms will supersede any other terms that the author or any third party may assert apply to any version of the manuscript.

[Find out more about compliance](#)

**\*\*Our flexible approach during the COVID-19 pandemic\*\***

If you need more time at any stage of the peer-review process, please do let us know. While our systems will continue to remind you of the original timelines, we aim to be as flexible as possible during the current pandemic.

This letter contains confidential information, is for your own use, and should not be forwarded to third parties.

Recipients of this email are registered users within the Editorial Manager database for this journal. We will keep your information on file to use in the process of submitting, evaluating and publishing a manuscript. For more information on how we use your personal details please see our privacy policy at <https://www.springernature.com/production-privacy-policy>. If you no longer wish to receive messages from this journal or you have questions regarding database management, please contact the Publication Office at the link below.

---

In compliance with data protection regulations, you may request that we remove your personal registration details at any time. (Use the following URL: <https://www.editorialmanager.com/jems/login.asp?a=r>). Please contact the publication office if you have any questions.

**Date:** 14 Jul 2021  
**To:** "Marjoni Imamora Ali Umar" marjoniimamora@gmail.com  
**From:** "Journal of Electronic Materials (JEMS)" jebamalar.jayapal@springernature.com  
**Subject:** Decision on your manuscript #JEMS-D-21-00730R3

Date:

14 Jul 2021

Manuscript ID:

JEMS-D-21-00730R3

Dear Dr Ali Umar,

We are pleased to inform you that your manuscript "Synthesis of large-scale cadmium oxide nanowires from an aqueous solution" has been accepted for publication in the Journal of Electronic Materials.

You will be contacted by Springer Author Services in due course with a link to complete the grant of rights. Please note that you will receive your proofs after the publishing agreement has been received through the online system.

Please remember to quote the manuscript number JEMS-D-21-00730R3 whenever inquiring about your manuscript.

With kind regards,

Jamie Buonato

Journal of Electronic Materials

**Authors may need to take specific actions to achieve compliance with funder and institutional open access mandates.** If your research is supported by a funder that requires immediate open access (e.g. according to Plan S principles) then you should select the gold OA route, and we will direct you to the compliant route where possible. For authors selecting the subscription publication route our standard licensing terms will need to be accepted, including our self-archiving policies. Those standard licensing terms will supersede any other terms that the author or any third party may assert apply to any version of the manuscript.

[Find out more about compliance](#)

**\*\*Our flexible approach during the COVID-19 pandemic\*\***

If you need more time at any stage of the peer-review process, please do let us know. While our systems will continue to remind you of the original timelines, we aim to be as flexible as possible during the current pandemic.

This letter contains confidential information, is for your own use, and should not be forwarded to third parties.

Recipients of this email are registered users within the Editorial Manager database for this journal. We will keep your information on file to use in the process of submitting, evaluating and publishing a manuscript. For more information on how we use your personal details please see our privacy policy at <https://www.springernature.com/production-privacy-policy>. If you no longer wish to receive messages from this journal or you have questions regarding database management, please contact the Publication Office at the link below.

---

In compliance with data protection regulations, you may request that we remove your personal registration details at any

time. (Use the following URL: <https://www.editorialmanager.com/jems/login.asp?a=r>). Please contact the publication office if you have any questions.